

BROW LIGHTS

LOW PROFILE SCENE LIGHT BARS

ABOUT THE BROW LIGHT

Thinner, brighter, and guaranteed forever. That's the FireTech way. The FireTech brow light is the ultimate lighting solution for the front of your fire apparatus and there is a reason it is trusted by some of the nation's largest fleets. Available with optional Integrated DOT marker lights and split circuits, this product is the first fixture specifically designed from the ground up for use on the front of an apparatus cab to illuminate the roadway. One of the secrets to the success of the FireTech brow light is the ability to attach the light at multiple points along the extrusion. This patented, adjustable rail mounting system allows the FireTech brow light to be attached more securely to the apparatus. This means that over time, it will not flex and succumb to moisture intrusion. The FireTech brow light's extreme reliability and proven track record is why it is the ultimate lighting solution for forward facing scene lighting.




KEY FEATURES:

- Optional Marker Lights
- All Aluminum Extrusion
- Multiple Mounting Options

DOMINATE THE SCENE WITH FIVE LIGHTS IN ONE

FireTech brow lights give you the right type of lighting for the leading edge of your apparatus cab. By combining a long distance spot beam with multiple flood beams, your apparatus will have both range and coverage.

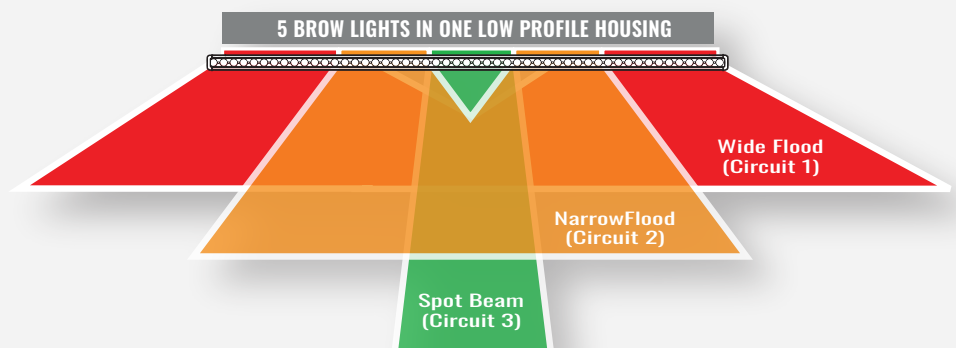

STANDARD BROW LIGHT MODELS

FT-B-46-* | 36 LEDs | 19,008 RAW LM



FT-B-54-2PKIT-* | 42 LEDs | 22,176 RAW LM



FT-B-65-* | 51 LEDs | 26,928 RAW LM



FT-B-72-* | 57 LEDs | 30,096 RAW LM



FT-B-72-3PKIT-* | 59 LEDs | 30,096 RAW LM



MARKER BROW LIGHT MODELS

FT-B-46-ML-* | 35 LEDs | 15,840 RAW LM



FT-B-46-ML3-* | 39 LEDs | 19,008 RAW LM




FT-B-72-ML-* | 59 LEDs | 28,512 RAW LM 80" AVAILABLE ON REQUEST FOR EXTRA LARGE CABS



FT-B-72-ML-3PKIT-* | 59 LEDs | 28,512 RAW LM



DIMENSIONS

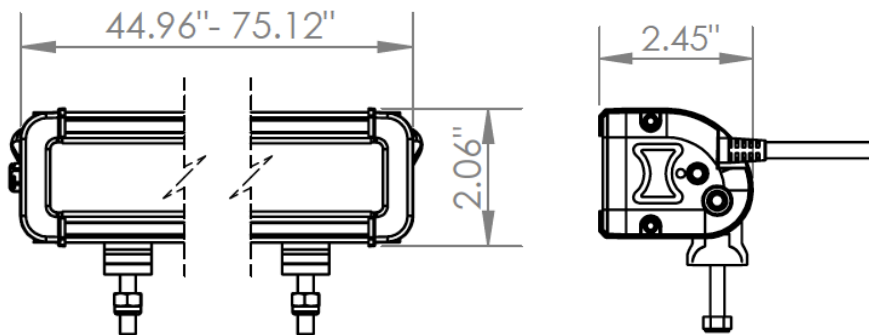

HIVIZ LIGHTING INC.



149 Twin Springs Road
Hendersonville, NC 28792



(703) 662-3458



firetech@hivizleds.com
www.hivizleds.com

BROW LIGHT DETAILS

Model / Order Number	Description	Raw Lumens	Effective Lumens	Wattage	Amperage @12v DC	Beam Pattern	Length	# of Mounting Feet
FT-B-46-ML-B	44" Brow Light. 35 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. Black housing.	15,840	11,088	165W	13.75A	Spot, Flood, Scene	44"	7
FT-B-46-ML-W	44" Brow Light. 35 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. White housing.	15,840	11,088	165W	13.75A	Spot, Flood, Scene	44"	7
FT-B-46-ML3-B	50" Brow Light. 39 LEDs. 5 Watt chip sets. 3 integrated marker lights, 4 circuits. Black housing.	19,336	13,535.2	189W	15.75A	Spot, Flood, Scene	50"	7
FT-B-46-ML3-W	50" Brow Light. 35 LEDs. 5 Watt chip sets. 3 integrated marker lights, 4 circuits. White housing.	19,336	13,535.2	189W	15.75A	Spot, Flood, Scene	50"	7
FT-B-46-B	46" Brow Light. 36 LEDs. 5 Watt chip sets. 3 circuits. Black housing.	19,008	13,305.6	180W	15.0A	Spot, Flood, Scene	46"	7
FT-B-46-W	46" Brow Light. 36 LEDs. 5 Watt chip sets. 3 circuits. White housing.	19,008	13,305.6	180W	15.0A	Spot, Flood, Scene	46"	7
FT-B-65-ML3-B	65" Brow Light. 51 LEDs. 5 Watt chip sets. 3 integrated marker lights, 4 circuits. Black housing.	26,328	18,429.6	249W	21.3A	Spot, Flood, Scene	65"	9
FT-B-65-ML3-W	65" Brow Light. 51 LEDs. 5 Watt chip sets. 3 integrated marker lights, 4 circuits. White housing.	26,328	18,429.6	249W	21.3A	Spot, Flood, Scene	65"	9
FT-B-65-B	65" Brow Light. 51 LEDs. 5 Watt chip sets. 3 circuits. Black housing.	26,928	18,849.6	255W	21.3A	Spot, Flood, Scene	65"	9
FT-B-65-W	65" Brow Light. 51 LEDs. 5 Watt chip sets. 3 circuits. White housing.	26,928	18,849.6	255W	21.3A	Spot, Flood, Scene	65"	9
FT-B-72-3PKIT-B	75" Brow Light. 65 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. Black housing.	30,096	21,067	285W	23.75A	Spot, Flood, Scene	75"	12
FT-B-72-3PKIT-W	75" Brow Light. 65 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. White housing.	30,096	21,067	285W	23.75A	Spot, Flood, Scene	75"	12
FT-B-72-ML-3PKIT-B	3 Piece 77" Brow Light with marker lights. For radiused cabs. 4 circuits. Black housing.	30,152	21,106.4	285W	23.75A	Spot, Flood, Scene	77"	12
FT-B-72-ML-3PKIT-W	3 Piece 77" Brow Light with marker lights. For radiused cabs. 4 circuits. White housing.	30,152	21,106.4	285W	23.75A	Spot, Flood, Scene	77"	12
FT-B-72-ML-B	75" Brow Light. 65 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. Black housing.	30,096	21,067	285W	23.75A	Spot, Flood, Scene	75"	9
FT-B-72-ML-W	75" Brow Light. 65 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. White housing.	30,096	21,067	285W	23.75A	Spot, Flood, Scene	75"	9
FT-B-72-B	72" Brow Light. 57 LEDs. 5 Watt chip sets. 30,096 lumens. 3 circuits (spot, flood and scene). Black housing.	30,096	21,067	285W	23.75A	Spot, Flood, Scene	72"	10
FT-B-72-W	72" Brow Light. 57 LEDs. 5 Watt chip sets. 30,096 lumens. 3 circuits (spot, flood and scene). White housing.	30,096	21,067	285W	23.75A	Spot, Flood, Scene	72"	10

