

FT-WL-2000

WL-2000

WORK AND AREA LIGHT




ABOUT THE WL-2000

The WL-2000 was designed as an ultra-reliable entry level utility flood and work light for use on fire apparatus. It is one of the smallest fixtures in the industry with a photometric footprint capable of meeting the NFPA 1901 requirements when used on the rear of an apparatus, or in areas like dunnage, hose bed, or walking surfaces. This fixture costs similar to others on the market of similar size but performs like no other. Cost effective, bright, and ultra reliable.

Key Features:

- Anti-Corrosive Coating
- 5 Watt Cree XPG-3 LEDs
- CE Approved
- Single Bolt Bracket

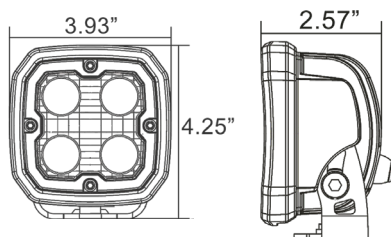

FT-WL-2000 SPECS

RAW LUMENS	2,112
EFFECTIVE LUMENS	1,478.4
WATTAGE	20W
AMPERAGE	1.66 A @12V DC
INPUT VOLTAGE	11-65V DC

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amp. Draw @ 12V DC	Beam Pattern	Dimensions	Weight
FT-WL-2000-S-B	2000 Lumen LED work light. 10 degree spot optic configuration. Black housing.	2,112	1,478.4	20W	1.66A	Spot	3.93" X 4.25" X 2.57"	1.6 lbs.
FT-WL-2000-S-W	2000 Lumen LED work light. 10 degree spot optic configuration. White housing.	2,112	1,478.4	20W	1.66A	Spot	3.93" X 4.25" X 2.57"	1.6 lbs.
FT-WL-2000-F-B	2000 lumen LED work light. 60 degree flood optic configuration. Black housing.	2,112	1,478.4	20W	1.66A	Flood	3.93" X 4.25" X 2.57"	1.6 lbs.
FT-WL-2000-F-W	2000 lumen LED work light. 60 degree flood optic configuration. White housing.	2,112	1,478.4	20W	1.66A	Flood	3.93" X 4.25" X 2.57"	1.6 lbs.
FT-WL-2000-FT-B	2000 lumen LED work light. 10 and 60 degree spot and flood optic configuration. Black housing.	2,112	1,478.4	20W	1.66A	Combo	3.93" X 4.25" X 2.57"	1.6 lbs.
FT-WL-2000-FT-W	2000 lumen LED work light. 10 and 60 degree spot and flood optic configuration. White housing.	2,112	1,478.4	20W	1.66A	Combo	3.93" X 4.25" X 2.57"	1.6 lbs.