
# 72" 3-PIECE BROW LIGHT

FT-B-72-3PKIT

# **ABOUT THE BROW LIGHT**

Available with optional integrated DOT marker lights and split circuits, this product is the first fixture specifically designed from the ground up for use on the front of an apparatus cab to illuminate the roadway. One of the secrets to the brow lights success is the ability to attach the light at multiple points along the extrusion. This patented, adjustable rail mounting system allows the FireTech brow light to be attached more securely to the apparatus. This means that over time, it will not flex and succumb to moisture intrusion. The FireTech brow light's extreme reliability and proven track record is why it is the ultimate lighting solution for forward facing scene lighting.

## DIMENSIONS



| PART#: FT-B-72-3PKIT-*     |                |  |  |  |  |  |
|----------------------------|----------------|--|--|--|--|--|
| RAW LUMENS                 | 30,096         |  |  |  |  |  |
| EFFECTIVE LUMENS           | 21,067         |  |  |  |  |  |
| WATTAGE                    | 285W           |  |  |  |  |  |
| TOTAL AMPERAGE             | 23.75A @12V DC |  |  |  |  |  |
| CIRCUIT 1 (SPOT) AMPERAGE  | 3.75A @12V DC  |  |  |  |  |  |
| CIRCUIT 2 (SCENE) AMPERAGE | 12.5A @12V DC  |  |  |  |  |  |
| CIRCUIT 3 (FLOOD) AMPERAGE | 7.5A @12V DC   |  |  |  |  |  |
| INPUT VOLTAGE              | 9-32V DC       |  |  |  |  |  |




### **KEY FEATURES**:

- 5W LEDs with Precision Acrylic Optics
- All Aluminum Extrusion
- Multiple Mounting Options
- Split Circuit Optic control

## DOMINATE THE Scene with five Lights in one

FireTech brow lights give you the right type of lighting for the leading edge of your apparatus cab. By combining a long distance spot beam with multiple flood beams, your apparatus will have both range and coverage.

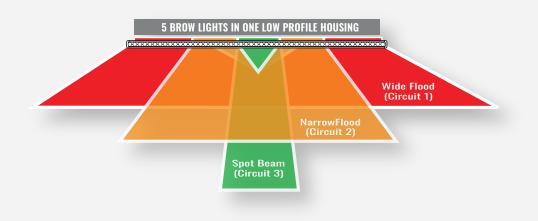

| Model / Order<br>Number | Description                                                                                       | Raw<br>Lumens | Effective<br>Lumens | Wattage | Amperage<br>@12v DC | Beam<br>Pattern        | Length | # of Mounting<br>Feet |
|-------------------------|---------------------------------------------------------------------------------------------------|---------------|---------------------|---------|---------------------|------------------------|--------|-----------------------|
| FT-B-72-3PKIT-B         | 75" Brow Light. 65 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. Black housing. | 30,096        | 21,067              | 285W    | 23.75A              | Spot, Flood,<br>Scene, | 75"    | 12                    |
| FT-B-72-3PKIT-W         | 75" Brow Light. 65 LEDs. 5 Watt chip sets. 5 integrated marker lights, 4 circuits. White housing. | 30,096        | 21,067              | 285W    | 23.75A              | Spot, Flood,<br>Scene, | 75"    | 12                    |

# **INCLUDED MOUNTING ACCESSORY**



PEDESTAL MOUNTING FEET Included with fixture

# **OPTIONAL MOUNTING ACCESSORIES**





#### CAB MOUNTING BRACKET | 3" RADIUS SURFACE

WHITE: P-MB-R3V2F00T-W BLACK: P-MB-R3V2F00T-B





#### L-FOOT BRACKET | VERTICAL SURFACE

WHITE: P-MB-LFOOT-W BLACK: P-MB-LFOOT-B

HIVIZ LIGHTING INC.



149 Twin Springs Road Hendersonville, NC 28792





firetech@hivizleds.com www.hivizleds.com