

20,000 LUMEN SCENE LIGHT

FT-SL-15




KEY FEATURES:

- Industry Standard 3/4" NPT Mount
- Designed for 60 GRMS Vibration
- AC or DC Configuration
- Anti-Corrosive Coating
- 7 Watt Cree XP-L LEDs
- CE Certified

ABOUT THE 20,000 RAW LUMEN POLE MOUNTED SCENE LIGHT

The FT-SL-15 LED Scene light is designed to be the most reliable LED scene light ever produced. This fixture has its roots in the extremely harsh global mining industry and has been adapted for use in the Fire service. It produces measurable light output comparable to scene lights advertised in the Fire Industry as 20,000 lumens while consuming a fraction of the power (150w total). The combination of a die-cast 6061 aluminum housing, unbreakable polycarbonate lens, integrated deutsch connector, reinforced gasketed bezel and a strengthened trunnion bracket create a one of a kind, high-powered light that will outshine and outlast the competition.

DIMENSIONS

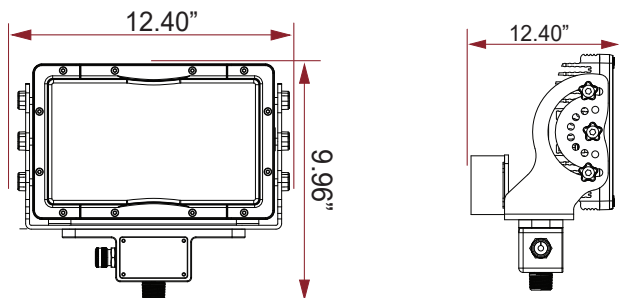

PART#: FT-SL-15

LEDS	30 X 5W
RAW LUMENS	20,000
EFFECTIVE LUMENS	11,888
HOUSING COLOR	BLACK OR WHITE
OPT. BEAM PATTERNS	SPOT, FLOOD, COMBO
DIMENSIONS	11.75" X 7.54" X 4.94"
WATTAGE	150W
AMP DRAW (@12V)	12.5A
INPUT VOLTAGE DC	11-65V DC OR 90-277V AC

FT-SL-15 DETAILS

Model / Order Number	Description	Raw Lumens	Effective Lumens	Wattage	Voltage Range	Amp. Draw	Beam Pattern	Dimensions	Weight
FT-SL-15-S-B	20,000 lumen work light. 10 degree spot optic configuration. Black housing.	20,000	11,888	150W	11-65V DC	12.5A @ 12VDC	Spot	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-S-W	20,000 lumen work light. 10 degree spot optic configuration. White housing.	20,000	11,888	150W	11-65V DC	12.5A @ 12VDC	Spot	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-F-B	20,000 lumen work light. 60 degree flood optic configuration. Black housing.	20,000	11,888	150W	11-65V DC	12.5A @ 12VDC	Flood	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-F-W	20,000 lumen work light. 60 degree flood optic configuration. White housing.	20,000	11,888	150W	11-65V DC	12.5A @ 12VDC	Flood	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-FT-B	20,000 lumen work light. 10 and 60 degree spot and flood optic configuration. Black housing.	20,000	11,888	150W	11-65V DC	12.5A @ 12VDC	Combo	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-FT-W	20,000 lumen work light. 10 and 60 degree spot and flood optic configuration. White housing.	20,000	11,888	150W	11-65V DC	1.25A @ 120V AC	Combo	12.4" X 9.97" X 5.07"	19.45 lbs.
FT-SL-15-S-110-B	20,000 lumen work light. 10 degree spot optic configuration. Black housing.	20,000	11,888	150W	90-277V AC	1.25A @ 120V AC	Spot	12.4" X 9.97" X 5.07"	22 lbs.
FT-SL-15-S-110-W	20,000 lumen work light. 10 degree spot optic configuration. White housing.	20,000	11,888	150W	90-277V AC	1.25A @ 120V AC	Spot	12.4" X 9.97" X 5.07"	22 lbs.
T-SL-15-F-110-B	20,000 lumen work light. 60 degree flood optic configuration. Black housing.	20,000	11,888	150W	90-277V AC	1.25A @ 120V AC	Flood	12.4" X 9.97" X 5.07"	22 lbs.
FT-SL-15-F-110-W	20,000 lumen work light. 60 degree flood optic configuration. White housing.	20,000	11,888	150W	90-277V AC	1.25A @ 120V AC	Flood	12.4" X 9.97" X 5.07"	22 lbs.
FT-SL-15-FT-110-B	20,000 lumen work light. 10 and 60 degree spot and flood optic configuration. Black housing.	20,000	11,888	150W	90-277V AC	1.25A @ 120V AC	Combo	12.4" X 9.97" X 5.07"	22 lbs.
FT-SL-15-FT-110-W	20,000 lumen work light. 10 and 60 degree spot and flood optic configuration. White housing.	20,000	11,888	150W	90-277V AC	1.25A @ 120V AC	Combo	12.4" X 9.97" X 5.07"	22 lbs.

