


30,000 LUMEN SCENE LIGHT

FT-SL-30

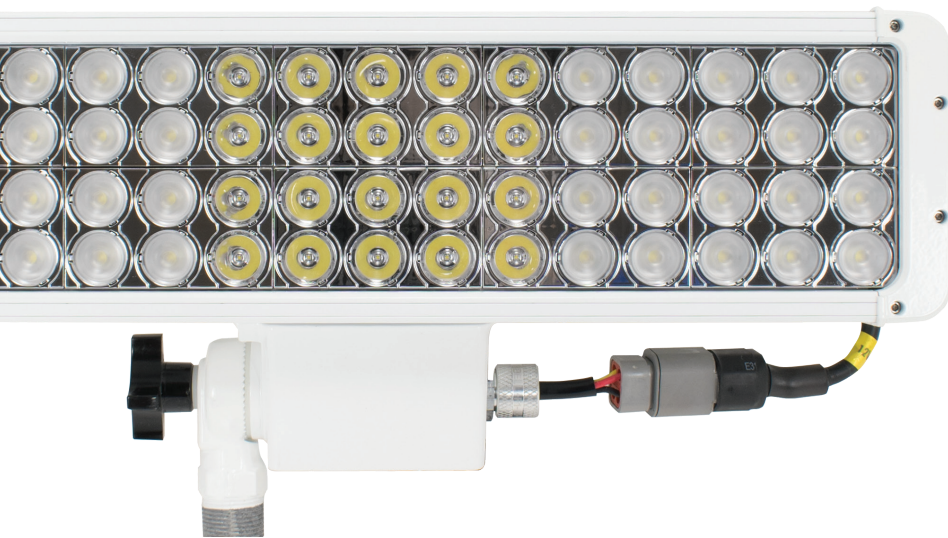

KEY FEATURES:


- Industry Standard 3/4" NPT Mount
- Designed for 60 GRMS Vibration
- Anti-Corrosive Coating
- CE Certified

ABOUT THE 30,000 RAW LUMEN LED POLE MOUNTED SCENE LIGHT

CAUTION! The FT-SL-30 is nothing like your grandmother's old halogen scene light. It draws just short of 300w and is capable of maintaining its output without overheating as long as you feed it power. Like its smaller partner, the FT-SL-15, the FT-SL-30 is based on the same core design technology as the Brow and MiniBrow series of lights. It incorporates our patented Prime Drive Active Thermal Management system, which ensures maximum output in all situations while still maintaining a protected operating temperature that will guarantee the LEDs are never overheated and will last their full 50,000 hour expected lifespan.



DIMENSIONS

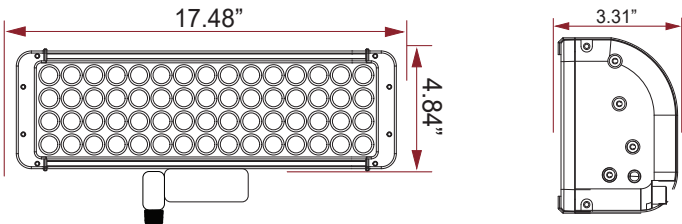

PART#: FT-SL-30

LEDS	60 X 5W
RAW LUMENS	31,680
EFFECTIVE LUMENS	22,176
HOUSING COLOR	BLACK OR WHITE
OPT. BEAM PATTERNS	SPOT, FLOOD, COMBO
DIMENSIONS	17.48" x 4.84" x 3.31"
WATTAGE	300W
AMP DRAW (@12V)	25A
INPUT VOLTAGE DC	11-65V DC

FT-SL-30 DETAILS

Model / Order Number	Description	Raw Lumens	Effective Lumens	Wattage	Voltage Range	Amp. Draw (@25V)	Beam Pattern	Dimensions	Weight
FT-SL-30-S-B	30,000 lumen work light. Spot optic configuration. Black housing. With 3/4" NPT pole mount bracket.	31,680	22,176	300W	11-65V DC	25A	Spot	17.48" X 4.84" X 3.28"	13.2 lbs.
FT-SL-30-S-W	30,000 lumen work light. Spot optic configuration. White housing. With 3/4" NPT pole mount bracket.	31,680	22,176	300W	11-65V DC	25A	Spot	17.48" X 4.84" X 3.28"	13.2 lbs.
FT-SL-30-F-B	30,000 lumen work light. 60 degree flood optic configuration. Black housing. With 3/4" NPT pole mount bracket.	31,680	22,176	300W	11-65V DC	25A	Flood	17.48" X 4.84" X 3.28"	13.2 lbs.
FT-SL-30-F-W	30,000 lumen work light. 60 degree flood optic configuration. White housing. With 3/4" NPT pole mount bracket.	31,680	22,176	300W	11-65V DC	25A	Flood	17.48" X 4.84" X 3.28"	13.2 lbs.
FT-SL-30-FT-B	30,000 lumen work light. 10 and 60 degree spot and flood optic configuration. Black housing. With 3/4" NPT pole mount bracket.	31,680	22,176	300W	11-65V DC	25A	Combo	17.48" X 4.84" X 3.28"	13.2 lbs.
FT-SL-30-FT-W	30,000 lumen work light. 10 and 60 degree spot and flood optic configuration. White housing. With 3/4" NPT pole mount bracket.	31,680	22,176	300W	11-65V DC	25A	Combo	17.48" X 4.84" X 3.28"	13.2 lbs.

