


To properly install this light, you must have a good understanding of automotive electrical procedures and systems, along with proficiency in the installation of lighting equipment.

## WIRING


To +12VDC (fuse @ 1.5A).....WHITE  
To -Chassis Ground.....BLACK



## INSTALLATION

1. Remove corner covers **A** to expose screw holes. Make a note of which cover goes on which corner.
2. Mark screw **B** locations on surface. Pre-drill or otherwise prepare holes as required.
3. Mark wire location and drill hole. Make connections and test light operation.
4. Install screws **B**
5. Re-install corner covers. **C** \*Note\* there are two sets of different cover geometries.  
Be sure to orient properly using corresponding locations from step 1.

Remove corner covers (x4) **A**

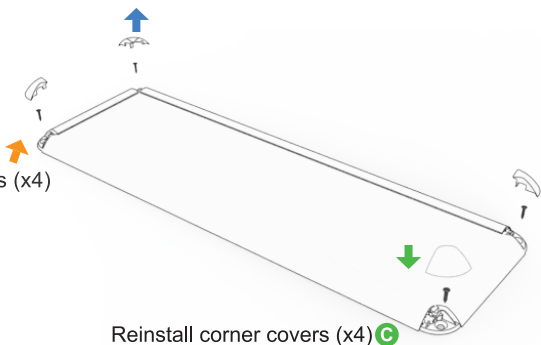

**B** Install the screws (x4)

Reinstall corner covers (x4) **C**