

FT-B-72-ML-3PKIT

ABOUT THE BROW LIGHT

Thinner, Brighter, and Guaranteed Forever. That's the FireTech way. The FireTech Brow Light is the ultimate lighting solution for the front of your Fire Apparatus. There is a reason it is trusted by some of the nation's largest fleets.


Available with optional Integrated DOT Marker lights and split circuits, this product is the first fixture specifically designed from the ground up for use on the front of an apparatus cab to illuminate the roadway. One of the secrets to the success of the FireTech Brow Light is the ability to attach the light at multiple points along the extrusion. This variation, the FT-B-72-ML-3PKIT, breaks our standard 72" FireTech Brow Light into 3 shorter sections that can be installed on cabs where the roof line is radiused. E-ONE "Quest", Pierce "Impel", Sutphen and Rosenbauer Cabs are all excellent candidates for the 3 Piece variant of the FireTech Brow Light.

Key Features:

- 5w LEDs with precision acrylic optics
- All Aluminum Extrusion
- Multiple Mounting Options
- Split Circuit Optic Control

FT-B-72-ML-3PKIT SPECS

RAW LUMENS	30,152
EFFECTIVE LUMENS	21,106.4
WATTAGE	285W
TOTAL AMPERAGE	23.75A @12V DC
CIRCUIT 1 (SPOT) AMPERAGE	5A @12V DC
CIRCUIT 2 (SCENE) AMPERAGE	10A @12V DC
CIRCUIT 3 (FLOOD) AMPERAGE	7.5A @12V DC
CIRCUIT 4 (MARKER) AMPERAGE	1.25A @12V DC
INPUT VOLTAGE	9-32V DC

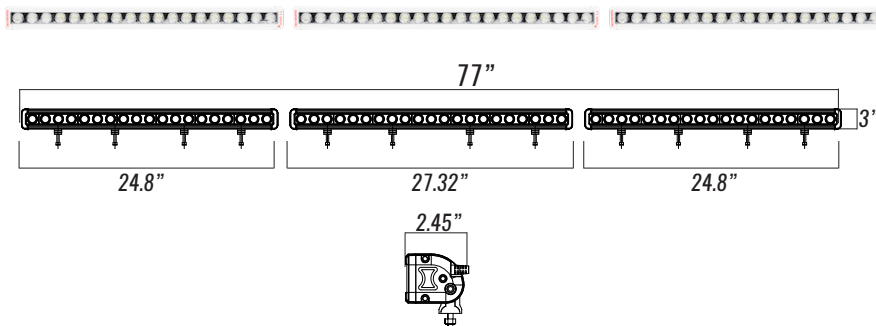

Included Mounting:



Pedestal Mounting Feet
Ships included with fixture

Optional Mounting:



Cab Radius Mounting Bracket
P-MB-R3FOOT-*



L Foot Mounting Bracket (Vertical Surface)
P-MB-LFOOT-*

Model #	Description	Raw Lumens	Effective Lumens	Wattage	Amperage @12v DC	Beam Pattern	Length	# of Mounting Feet
FT-B-72-ML-3PKIT-B	3 Piece 77" Brow Light with marker lights. For radiused cabs. 4 circuits. Black housing	30,152	21,106.4	285W	23.75A	Spot, Flood, Scene	77"	12
FT-B-72-ML-3PKIT-W	3 Piece 77" Brow Light with marker lights. For radiused cabs. 4 circuits. White housing	30,152	21,106.4	285W	23.75A	Spot, Flood, Scene	77"	12